

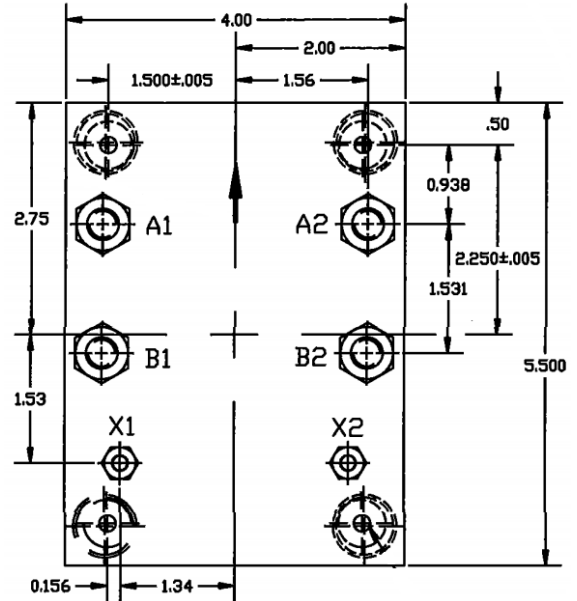


G-1125-A871A-C, Contactor, Continuous Duty, SPDT Main Contacts NSN: 5945-00-629-6271

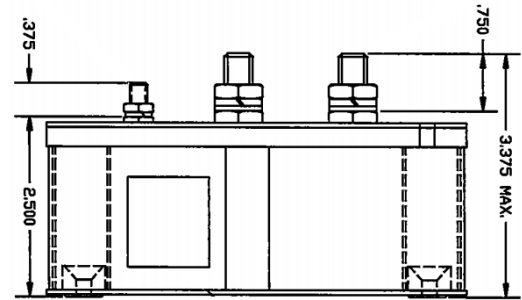

Product Overview:

- Continuous Duty
- Rated for 100 Amps, DC
- Economizing coil
- Contact NPAS for specific needs and customizable options.



Performance Specifications

Coil Data		Contact Data					
		Main			Auxiliary		
		SPDT			N/A		
Nominal Voltage	28VDC	Life (cycles)	28VDC (amps)	200VAC (amps)	Life (cycles)	28VDC (amps)	115VAC (amps)
Pickup	18VDC max hot	50,000	100	-	-	-	-
Dropout	11VDC max hot	-	-	-	-	-	-
Coil Resistance	-	-	-	-	-	-	-
Coil Current	Inrush 4 amps, Hold .41amps	-	-	-	-	-	-
Suppression	-	-	-	-	-	-	-
Duty	Continuous	-	-	-	-	-	-
Electrical Data		100,000	-	-	-	-	-
Insulation Resistance	≥100MΩ @ 500VDC min	Voltage Drop					125mV
Dielectric Strength (sea level)	-	Contact Resistance					-
Contacts to Ground	1050Vrms	Timing					-
Between contacts	1050Vrms	Release					-
Coil to Ground	1050Vrms	Transfer					-
Environmental		Bounce					-
Temperature range	-62°C to +71°C	Mechanical Data					-
Altitude	-	Weight					3lb 2oz
Shock	-	Specifications IAW					Meets materials and workmanship requirements of MIL-PRF-6106
Vibration, sinusoidal	10G, 10-2000hz						